

ACM 25

Self Contained Ice Machine 10 kg

Item #:
Project:
Quantity:



FEATURES

- Produces individual Gourmet crystal clear ice cubes. Hygienic ABS plastic exterior. Plug-n-play: does not require plumbing.
- • (Bottled) Water is hand-poured into reservoir. Ideal for areas with poor water quality. Front panel water reservoir level indicator.
- Water forming from melting ice cubes in the storage bin is re-circulated into reservoir.
- Simple and reliable electro-mechanic controls.
- Front panel in and out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled model only).
- Easily accessible front panel mount ON-OFF switch.
- Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.



AC M 25
Medium Gourmet 20 g
Ø 30 x H 34 mm

CONDENSING SYSTEM

Air cooled

REFRIGERANT GAS

R134a

VOLTAGE V/Hz/ph

230/50/1
230/60/1

INTERNAL BIN CAPACITY

3 kg

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	38
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10	10

IMPORTANT NOTICE:
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free **App Scotsman Ice**
Apple store
Google play
Windows store



www.scotsman-ice.it
www.scotsman-ice.com


Self Contained Ice Machine 10 kg

ACM 25

Self Contained Ice Machine 10 kg

Item #:
Project:
Quantity:

Self Contained Ice Machine 10 kg

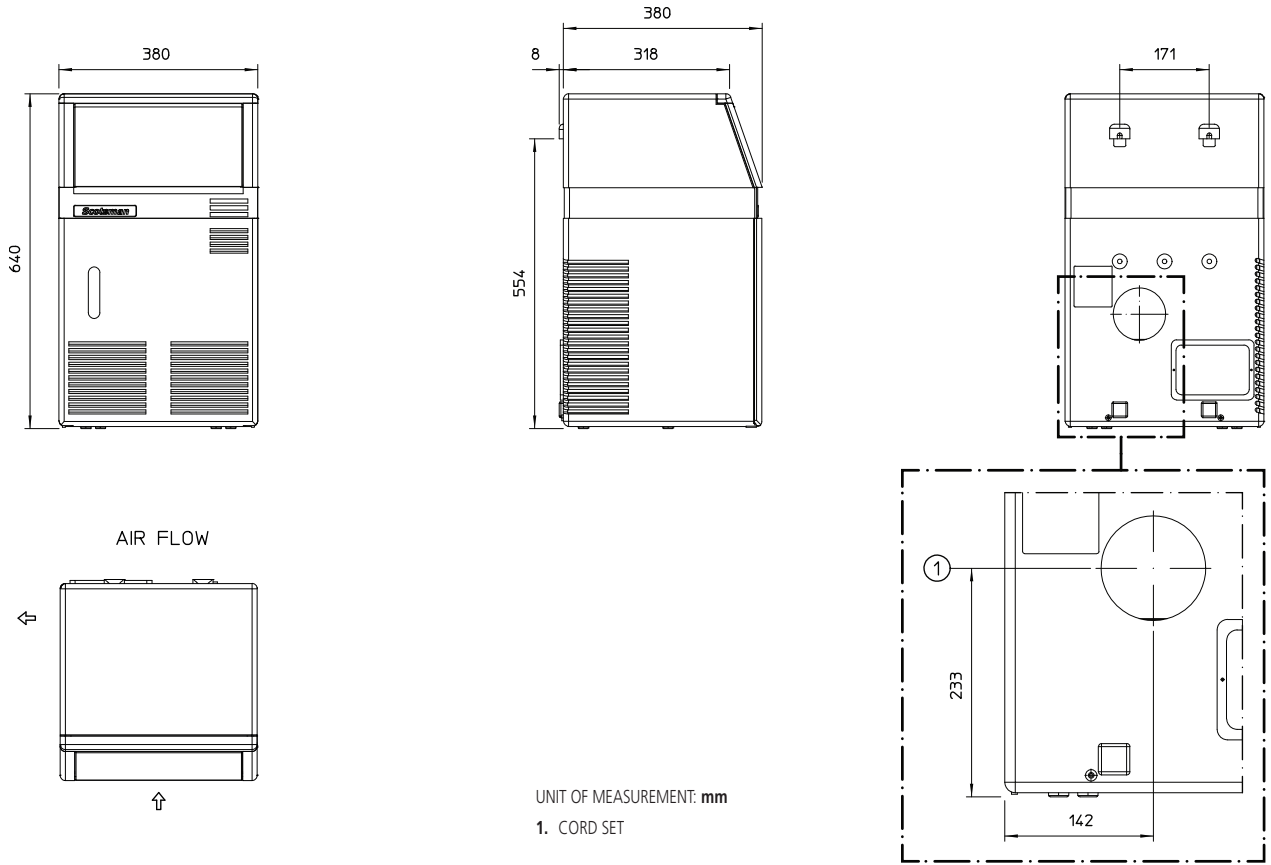

UNIT DATA		SHIPPING DATA										
Size (W x D x H)		380 x 388 x 640 mm		Carton (W x D x H)		490 x 470 x 740 mm						
Net weight		31 kg		Weight		34 kg						
Version	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size	
		10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A	
AC M 25 AE	230/50/1	10	10	9	92.0	6.0	0.3	270	510	3 x 1.0	10	
AC M 25 AE	230/60/1	10	10	9	92.0	6.0	0.3	270	510	3 x 1.0	10	

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions