

AF 124 *XSafe*

Self Contained Ice Machine 122 kg

Item #:
Project:
Quantity:



FEATURES

- Produces granular shape ice flakes, 75% hardness. Ice scoop holder safely positioned in ice-storage bin.
- Resistant stainless steel exterior.
- Advanced diagnostics computerized control.
- Front panel in & out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled version).
- Easily accessible, front panel mount, ON-OFF Switch.
- Easy, front panel access to technical / service area of the machine. Routine maintenance visible alarm light on front panel.
- Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



AF 124
Flake ice
Residual water content 25%

CONDENSING SYSTEM

Air cooled
Water cooled

REFRIGERANT GAS

R134a

VOLTAGE V/Hz/ph

230/50/1

INTERNAL BIN CAPACITY

40 kg

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com


Self Contained Ice Machine 122 kg

AF 124 XSafe

Self Contained Ice Machine 122 kg

Item #:
Project:
Quantity:

Self Contained Ice Machine 122 kg

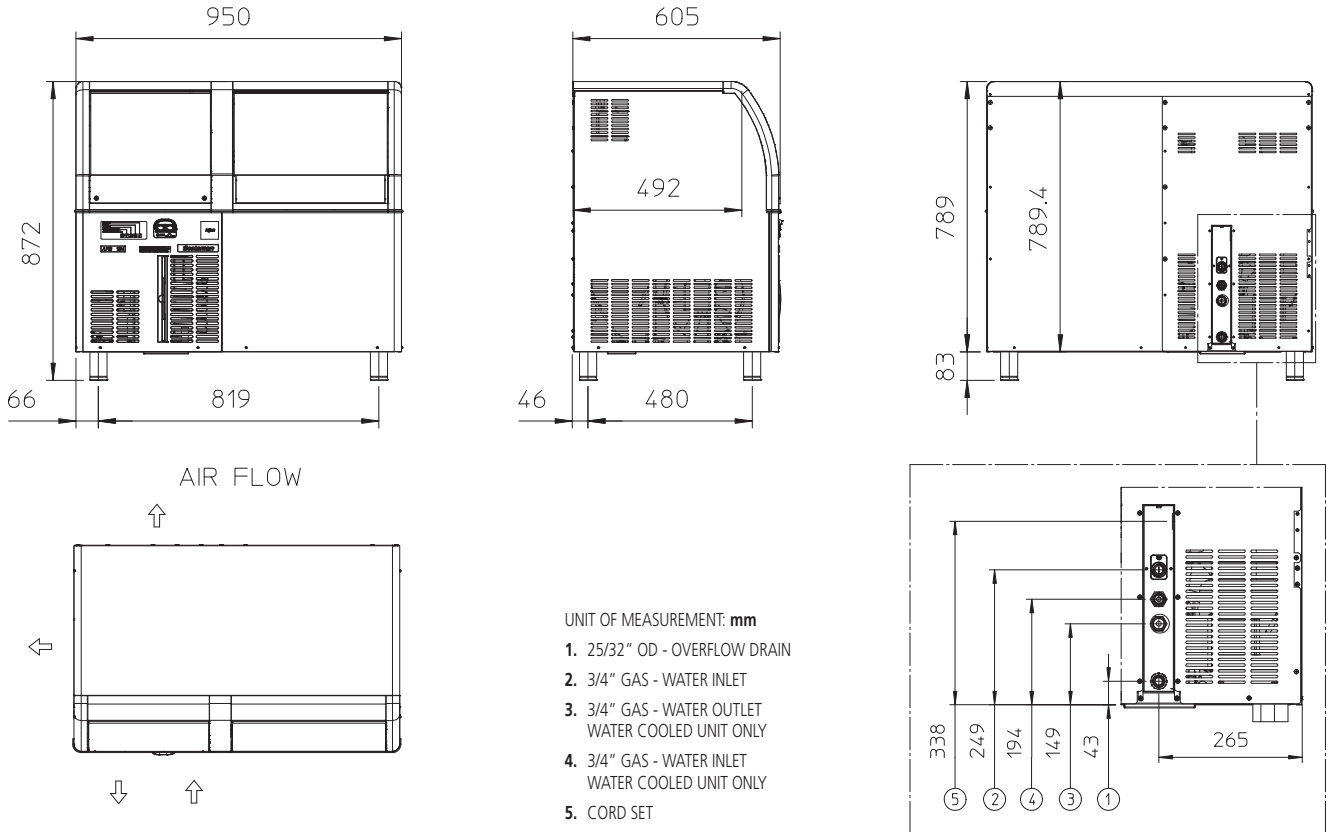

UNIT DATA		SHIPPING DATA										
Size (W x D x H)	950 x 605 x 872 mm	Carton (W x D x H)	1030 x 680 x 960 mm									
Net weight	66 kg	Weight	77 kg									
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size	
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W	W	No. x Ømm²	A	
AF 124 AS	230/50/1	122	113	91	12.5	11.4	3.9	510	1200	3 x 1.5	10	
AF 124 WS	230/50/1	118	110	92	12.0	11.0	27.0	450	1200	3 x 1.5	10	

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions