

# EF 124 *XSafe*

## Self Contained Ice Machine 122 kg

Item #:
Project:
Quantity:



### FEATURES

- Produces granular shape ice flakes, 80% hardness.
- Ice scoop holder safely positioned in ice-storage bin.
- Advanced diagnostics computerized control.
- Front panel in and out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled version only). Easily accessible, front panel mount, ON-OFF Switch.
- Easy, front panel access to technical / service area of the machine.
- Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.
- PWD - Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



### CONDENSING SYSTEM

Air cooled  
Water cooled

### REFRIGERANT GAS

R134a

### VOLTAGE V/Hz/ph

230/50/1

### INTERNAL BIN CAPACITY

40 kg

### CERTIFICATIONS



### OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

**IMPORTANT NOTICE:**  
Models and specifications are subject to change without notice.  
This spec sheet is meant for commercial purpose only.  
For technical documentation please refer to our service manuals.

[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)


Self Contained Ice Machine 122 kg

# EF 124 XSafe

## Self Contained Ice Machine 122 kg

Item #:
Project:
Quantity:

Self Contained Ice Machine 122 kg

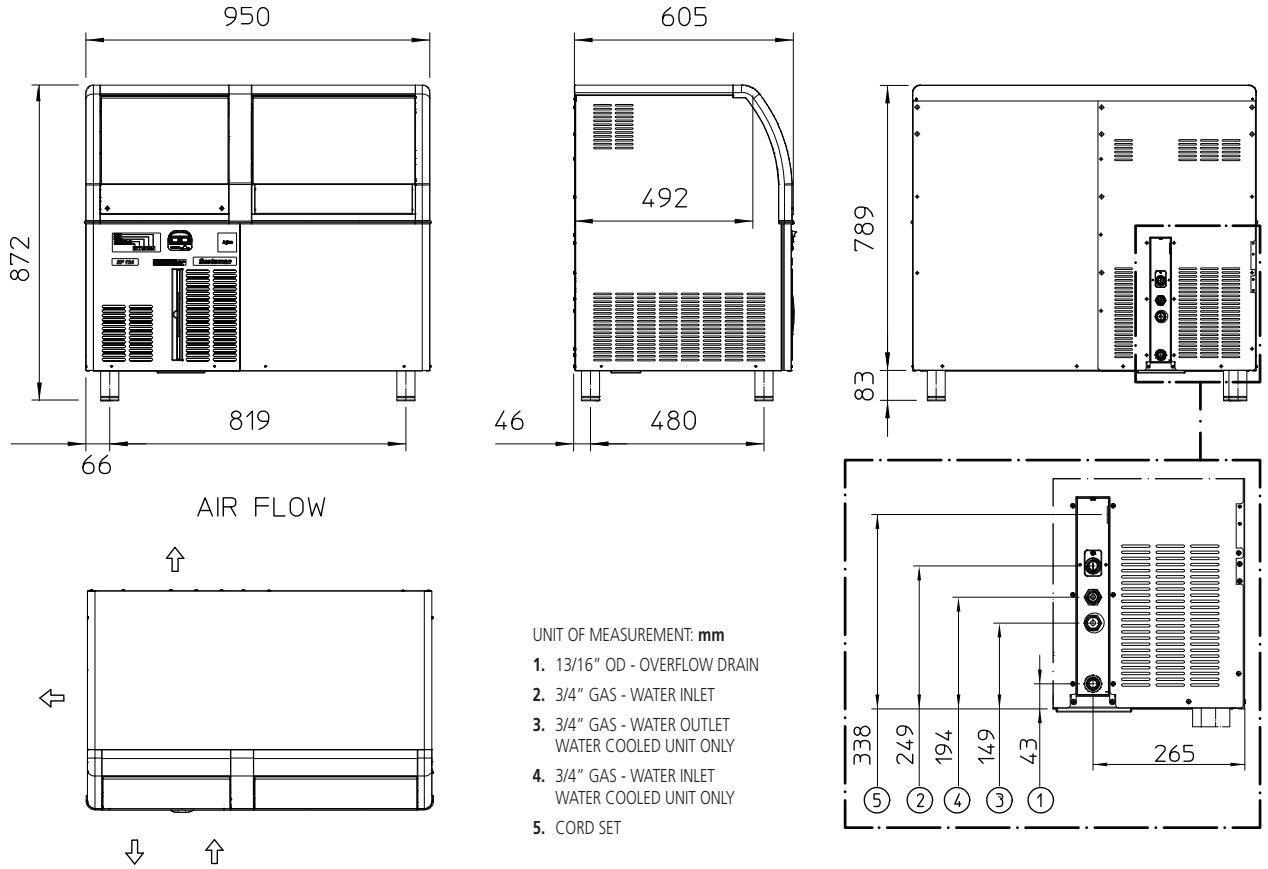

UNIT DATA		SHIPPING DATA										
Size (W x D x H)	950 x 605 x 872 mm	Carton (W x D x H)	1030 x 680 x 960 mm									
Net weight	68 kg	Weight	79 kg									
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size	
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W	W	No. x Ømm <sup>2</sup>	A	
EF 124 AS	230/50/1	122	113	91	12.5	11.4	3.9	510	1200	3 x 1.5	10	
EF 124 WS	230/50/1	118	110	92	12.0	11.0	27.0	450	1200	3 x 1.5	10	

(\*) Data refer to 32°C Amb. / 21°C Water temperature conditions