

MF 66 *XSafe*

Modular Ice Machine 1150 kg

Item #:
Project:
Quantity:



FEATURES

- Hermetic compressor. Stainless steel auger and freezing cylinder (evaporator). Equipped with an electronic control board.
- Ice breaker made in specially strengthened alloy, allowing for greater extrusion pressure to deliver a dryer-quality of ice (85% dry).
- Long-lasting stainless steel ball-bearings. Double protection - electronic rotation sensor and drive coupling - on gear motor and gear reducer.
- Low-water sensor protection on refrigeration and gear motor system. Optical ice level sensor for machine shut down.
- Stainless steel side panels in scotch-brite finish, with rounded corners for enhanced ease of cleaning and aesthetics.
- Side panels are removable on all four sides to ease maintenance and after-sales service operations.
- PS plastic top cover.
- Reduced height to ease installation.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



MF 66
Superflake ice
Residual water content 15%

CONDENSING SYSTEM

Air cooled
Remote condenser
Water cooled

REFRIGERANT GAS

R404A
R452A

VOLTAGE V/Hz/ph

230/50/3
230/60/3
380/60/3N
400/50/3N

RECOMMENDED BINS

Head	Bins		kg
MF 66	●	UBH1100	553
	●	UBH1600	812
	●	UBH2250	1068
	●	SIS700	318 + 73
	●	SIS1350	613 + 73 + 73

LEGEND:

- ✓ : Perfect combination between ice maker and bin
- : Ice chute cut-out performed upon installation
- CBTxxxxxxxx : need additional bin top

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com


Modular Ice Machine 1150 kg

MF 66 *XSafe*

Modular Ice Machine 1150 kg

Item #:
Project:
Quantity:

Modular Ice Machine 1150 kg

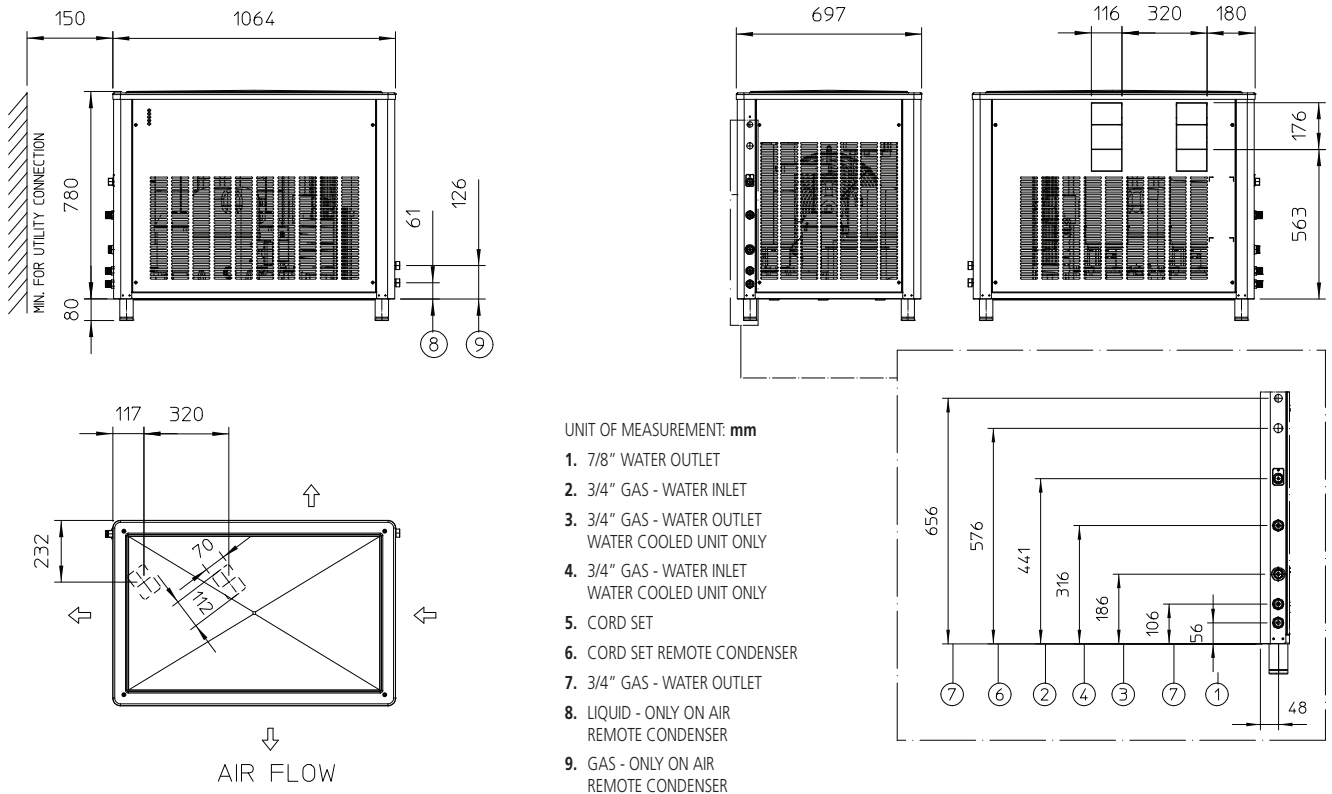

UNIT DATA		SHIPPING DATA	
Size (W x D x H)	1064 x 697 x 860 mm	Carton (W x D x H)	1170 x 760 x 1040 mm
Net weight	179 kg	Weight	198 kg

Version	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
		10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
MF 66 AS	230/50/3	1150	1070	870	9.2	80.0	36.3	3900	3135	4 x 2.5	16
MF 66 AS	400/50/3N	1160	1060	800	10.8	86.0	33.6	3900	3240	5 x 1.5	10
MF 66 ASR	400/50/3N	1050	990	770	10.0	76.7	32.0	3500	2900	5 x 1.5	16
MF 66 WS	400/50/3N	1100	1070	920	8.4	77.5	250.0	3300	2900	5 x 1.5	16
MF 66 AS	230/60/3	1150	1070	870	9.2	80.0	36.3	3900	3135	4 x 2.5	16
MF 66 WS	230/60/3	1220	1220	1100	7.3	80.0	250.0	6000	3135	4 x 2.5	16
MF 66 AS	380/60/3N	1150	1070	870	9.2	80.0	36.3	3900	3135	5 x 2.5	16
MF 66 WS	380/60/3N	1220	1220	1100	7.3	80.0	250.0	6000	3135	5 x 2.5	16

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions