




Aroma Perfect Taste



Model: **CSAFG1VA**

Aroma

SEASONER CABINET - CHEESE CAVE - SERIE AROMA - TEMP. -2 / +30 °C - 510 LT. GLASS DOOR - AIR CONDENSING UNIT



Always perfect results



Ideal climate




Easy to use



Experience at your service




Maximum visibility




Flexibility




Energy saving



Ideal for any installation



Create your layout



Easy to clean

CE

COMMANDS, CONTROLS AND SAFETY DEVICES

- HACCP alarm management.
- Specific probe for humidity regulation.
- Connectivity with Wi-Fi remote control (optional).
- 5" touch screen color display with control interface
- Responsive humidity management
- Automatic climate change management
- The know-how of the best experts at your disposal

STRUCTURAL CHARACTERISTICS

- Monoblock construction.
- Internal stainless steel.
- External in Skinplate steel.
- 80 mm-thick insulation.
- High density CFC and HCFC-free PU insulation (42 kg/m3).
- Ergonomic handle with wooden insert.
- Self-closing doors with opening position block at 100° and magnetic gaskets on all 4 sides.
- Silk-screened tempered glass easily-open Dashboard to facilitate periodic maintenance (condenser cleaning).
- Rounded cell corners for easy cleaning.
- Lower infill plinth.
- Indirect ventilation thanks to the full-length duct system for optimal air circulation and uniform temperature distribution.
- 4000K LED door lighting.
- Locking fixtures.
- Wide range of customization possibilities
- Double glazed door with high insulation level

REFRIGERANT GROUP

- Monoblock ceiling system with an evaporator outside the cold room to allow for the exploitation of the entire refrigerated volume.
- Automatic defrost and defrost water self evaporating without the use of energy.
- Tropicalized group (class "T" 43°C).
- High efficiency tropicalized refrigeration unit.
- Climate class 4.

STANDARD EQUIPMENT

2-RFL: N. 2 FIXED SHELVES WITH WOODEN PROFILE

WI-FI: WI-FI CONNECTION

ZCTP: CLOSING PLINTH

2-CGC: N. 2 C SLIDES COUPLE

OPTIONAL TO BE REQUESTED WHEN ORDERING

TS-AVPG: AC 208/230 V - 60 HZ

EXTRA ACCESSORIES THAT CAN BE INSTALLED FOLLOWING PURCHASE

VRG: DIP TRAY

IOTC-3: COLDCLOUD CONNECTION FEE - 3 YEARS

IOTC-1: COLDCLOUD CONNECTION FEE - 1 YEAR

KRT-AVPG: WHEEL KIT WITH BRAKE

IOTK-A: CONNECTIVITY KIT

RSL: SLIDING SHELF WITH WOODEN PROFILE

RFL: FIXED SHELF WITH WOODEN PROFILE

KCL: STAINLESS STEEL DRAWER KIT WITH WOODEN FRONT COMPLETE WITH GUIDES

CGCA-A: PAIR OF "C" SHAPED GUIDES WITH ANTI-TIP

GAC: HOOK

DIMENSIONS

Width	mm	780
Depth	mm	965
Height	mm	2090
Door Span Width	mm	620
Internal Depth	mm	725
Door Span Height	mm	1442
Package width	mm	820
Package depth	mm	1005
Package height	mm	2240
Package volume	m ³	1,85
Weight	Kg	205
Weight with package	Kg	215

TECHNICAL DATA

Working temperature	°C	-2/+30
Motor		Air condensing unit
Climate class		Classe 4
GWP - Global Warming Potential		1430
Refrigerant - Type		R134A
Refrigerant - Quantity	g	380


CAPACITY

Capacity		510 Lt
----------	--	--------

POWER SUPPLY

Power supply voltage	V	230
Max electric power	kW	1715
Cooling power	W	320
Max consumption	A	8,3
Frequency	Hz	50

* TN - Evap. temp. -10°C / Cond. temp. +45°C || BT - Evap. temp. -25°C / Cond. temp. +45°C.

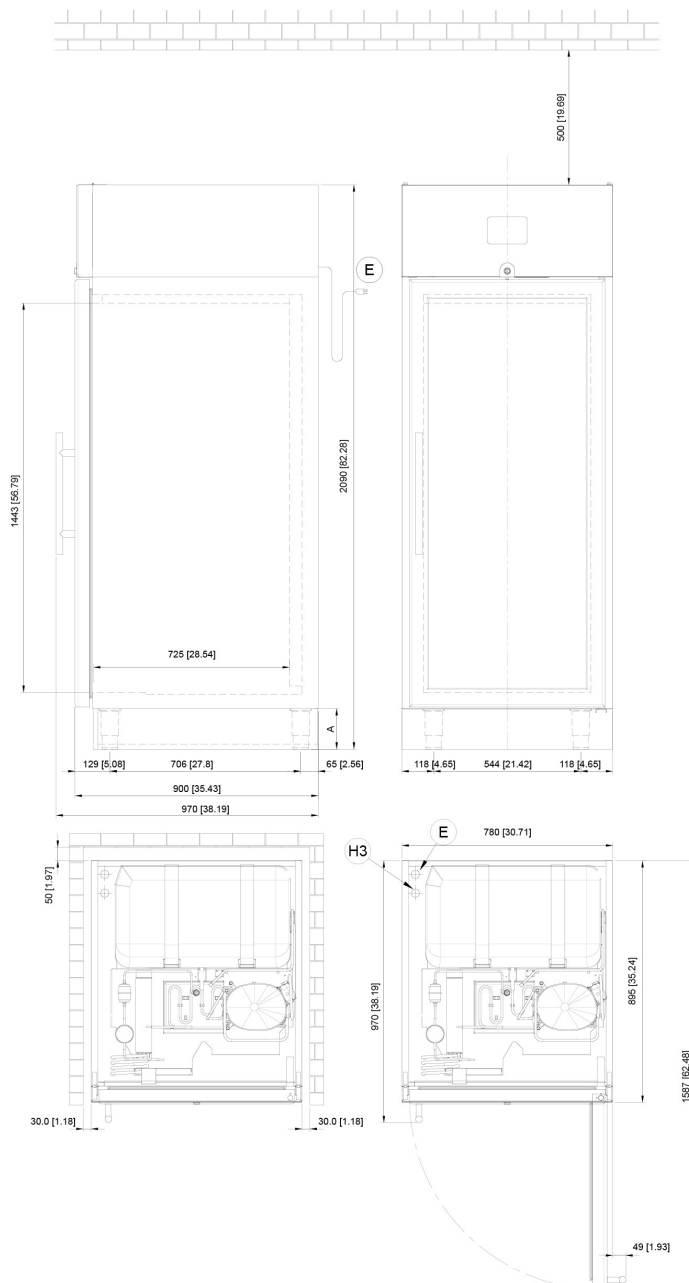

DIMENSIONI mm
DIMENSIONS [in]

A = 140 / 200 PIEDINI - FEET
A = 155 RUOTE \varnothing 100 - CASTORS \varnothing 100

- E** IT - INGRESSO CAVO ALIMENTAZIONE ELETTRICA
EN - ELECTRICAL POWER SUPPLY CABLE INLET
FR - ENTRÉE DU CÂBLE D'ALIMENTATION ÉLECTRIQUE
DE - ANSCHLUß STROMKABEL
ES - ENTRADA CABLE DE ALIMENTACIÓN ELÉCTRICA
RU - ВХОД ДЛЯ ЭЛЕКТРИЧЕСКОГО КАБЕЛЯ ПИТАНИЯ

- H3** CONNESSIONE INGRESSO ACQUA UMIDIFICATORE
HUMIDIFIER WATER INLET CONNECTION