



Genuine freshness




Model: **CFNO071A-B**


CABINETS GASTRONORM LINE - POP LINE - TEMP. -20 / -10 °C - 24 x GN 2/1. AIR CONDENSING UNIT



Easy to use




100% Recyclable




Ideal for any installation



Shiny cleanliness



80 mm
High insulation thickness



Respecting the environment



Ecological refrigerant gas



CONTROL AND CONNECTIVITY

- HACCP alarm indication
- Command interface with capacitive teletermostat

STRUCTURAL CHARACTERISTICS

- Monoblock construction.
- External in Skinplate steel.
- 80 mm-thick insulation.
- Locking fixtures.
- Die-moulded and leakproof internal base
- Copper-aluminium evaporating coil, cataphoresis-painted
- Magnetic gasket on all four sides of the door and main body
- Easily-open Dashboard to facilitate periodic maintenance (condenser cleaning)
- Painted condensing coil with high thermal efficiency exempt from cleaning
- Polymer interior
- Moulded side panels with 24 positions

REFRIGERANT GROUP

- Automatic defrost and defrost water self evaporating without the use of energy.
- Tropicalized group (class "T" 43°C).
- Climate class 5.
- R290 ecological refrigerant gas

STANDARD EQUIPMENT

3-GRR-GN21: N. 3 RILSAN SHELFs GN 2/1, PLASTICIZED - FOR EACH COMPARTMENT

OPTIONAL TO BE REQUESTED WHEN ORDERING

SKRT-AVPG: WHEEL KIT WITH BRAKE

EXTRA ACCESSORIES THAT CAN BE INSTALLED FOLLOWING PURCHASE

KRT-AVPG: WHEEL KIT WITH BRAKE

GRR-GN21: RILSAN SHELF GN 2/1 - PLASTICIZED

DIMENSIONS

| | | |
|---------------------|----|------|
| Width | mm | 700 |
| Depth | mm | 840 |
| Height | mm | 2090 |
| Useful Inner Width | mm | 620 |
| Max Useful Height | mm | 1442 |
| Package width | mm | 740 |
| Package depth | mm | 880 |
| Package height | mm | 2240 |
| Weight | Kg | 136 |
| Weight with package | Kg | 146 |

TECHNICAL DATA

| | | |
|--------------------------------|----|---------------------|
| Working temperature | °C | -20 / -10 |
| Motor | | Air condensing unit |
| Doors numbers | | 1 |
| Climate class | | 5 |
| Energy class | | D |
| EEL - Energy Efficiency Index | | 46,67 |
| GWP - Global Warming Potential | | 3 |
| Refrigerant - Type | | R290 |
| Refrigerant - Quantity | g | 47 |


CAPACITY

| | | |
|---------------|----|-------------|
| Capacity - GN | | 24 x GN 2/1 |
| Useful volume | lt | 644,40 |
| Capacity | | 24 x GN 2/1 |

POWER SUPPLY

| | | |
|----------------------|----|-------|
| Max electric power | kW | 0,586 |
| Cooling power | kW | 0,516 |
| Max consumption | A | 2,8 |
| Power supply voltage | V | 230 |
| Electrical_Phase | | 1 |
| Frequency | Hz | 50 |

* BT - Evap. temp. -25°C / Cond. temp. +45°C.

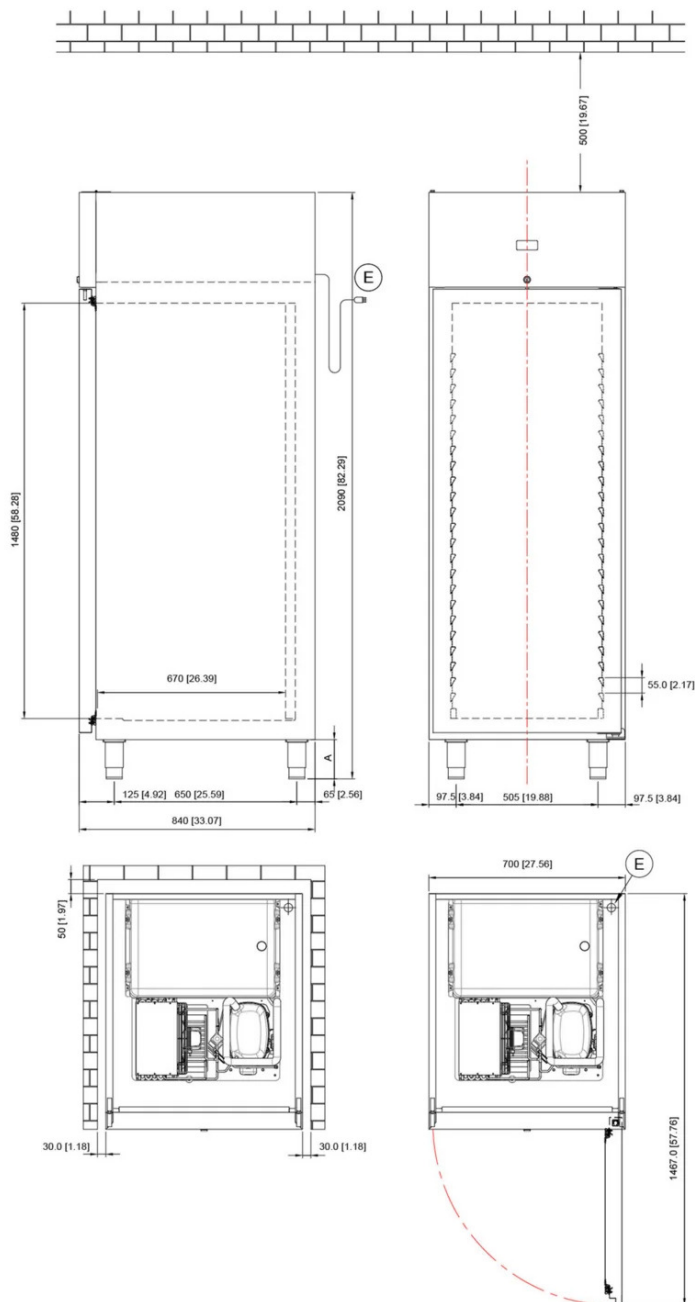


DIMENSIONI mm
DIMENSIONS [in]

A = 120 / 160 PIEDINI - FEET
A = 155 RUOTE \varnothing 100 - CASTORS \varnothing 100

(E) IT - INGRESSO CAVO ALIMENTAZIONE ELETTRICA
EN - ELECTRICAL POWER SUPPLY CABLE INLET
FR - ENTRÉE DU CÂBLE D'ALIMENTATION ÉLECTRIQUE
DE - ANSCHLUß STROMKABEL
ES - ENTRADA CABLE DE ALIMENTACIÓN ELÉCTRICA
RU - ВХОД ДЛЯ ЭЛЕКТРИЧЕСКОГО КАБЕЛЯ ПИТАНИЯ



Genuine freshness

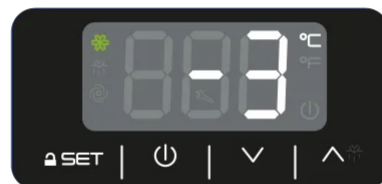


Model: **CFNO071A-R**


CABINETS GASTRONORM LINE - POP LINE - TEMP. -20 / -10 °C - 24 x GN 2/1. AIR CONDENSING UNIT



Easy to use




100% Recyclable



Ideal for any installation



Shiny cleanliness



High insulation thickness
80 mm



Respecting the environment



Ecological refrigerant gas



CONTROL AND CONNECTIVITY

- HACCP alarm indication
- Command interface with capacitive teletermostat

STRUCTURAL CHARACTERISTICS

- Monoblock construction.
- External in Skinplate steel.
- 80 mm-thick insulation.
- Locking fixtures.
- Die-moulded and leakproof internal base
- Copper-aluminium evaporating coil, cataphoresis-painted
- Magnetic gasket on all four sides of the door and main body
- Easily-open Dashboard to facilitate periodic maintenance (condenser cleaning)
- Painted condensing coil with high thermal efficiency exempt from cleaning
- Polymer interior
- Moulded side panels with 24 positions

REFRIGERANT GROUP

- Automatic defrost and defrost water self evaporating without the use of energy.
- Tropicalized group (class "T" 43°C).
- Climate class 5.
- R290 ecological refrigerant gas

STANDARD EQUIPMENT

3-GRR-GN21: N. 3 RILSAN SHELFs GN 2/1, PLASTICIZED - FOR EACH COMPARTMENT

OPTIONAL TO BE REQUESTED WHEN ORDERING

SKRT-AVPG: WHEEL KIT WITH BRAKE

EXTRA ACCESSORIES THAT CAN BE INSTALLED FOLLOWING PURCHASE

KRT-AVPG: WHEEL KIT WITH BRAKE

GRR-GN21: RILSAN SHELF GN 2/1 - PLASTICIZED

DIMENSIONS

| | | |
|---------------------|----|------|
| Width | mm | 700 |
| Depth | mm | 840 |
| Height | mm | 2090 |
| Useful Inner Width | mm | 620 |
| Max Useful Height | mm | 1442 |
| Package width | mm | 740 |
| Package depth | mm | 880 |
| Package height | mm | 2240 |
| Weight | Kg | 136 |
| Weight with package | Kg | 146 |

TECHNICAL DATA

| | | |
|--------------------------------|----|---------------------|
| Working temperature | °C | -20 / -10 |
| Motor | | Air condensing unit |
| Doors numbers | | 1 |
| Climate class | | 5 |
| Energy class | | D |
| EEL - Energy Efficiency Index | | 46,67 |
| GWP - Global Warming Potential | | 3 |
| Refrigerant - Type | | R290 |
| Refrigerant - Quantity | g | 47 |


CAPACITY

| | | |
|---------------|----|-------------|
| Capacity - GN | | 24 x GN 2/1 |
| Useful volume | lt | 644,40 |
| Capacity | | 24 x GN 2/1 |

POWER SUPPLY

| | | |
|----------------------|----|-------|
| Max electric power | kW | 0,586 |
| Cooling power | kW | 0,516 |
| Max consumption | A | 2,8 |
| Power supply voltage | V | 230 |
| Electrical_Phase | | 1 |
| Frequency | Hz | 50 |

* BT - Evap. temp. -25°C / Cond. temp. +45°C.

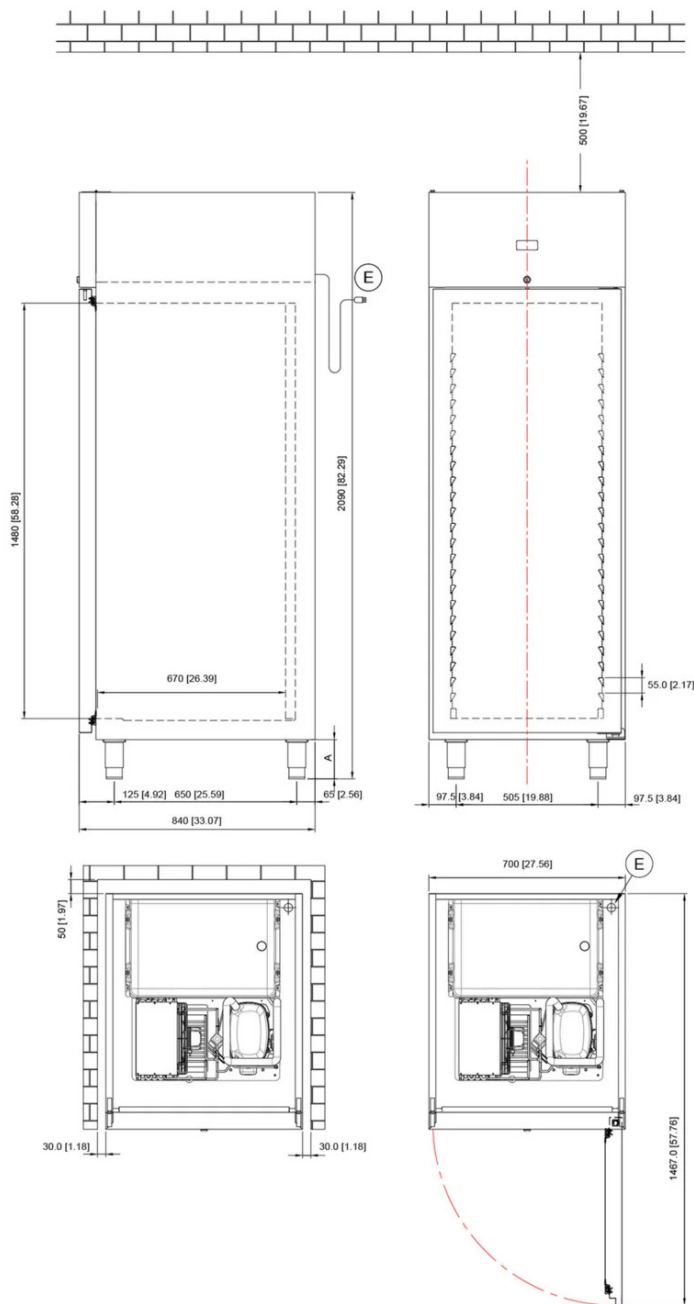


DIMENSIONI mm
DIMENSIONS [in]

A = 120 / 160 PIEDINI - FEET
A = 155 RUOTE \varnothing 100 - CASTORS \varnothing 100

(E) IT - INGRESSO CAVO ALIMENTAZIONE ELETTRICA
EN - ELECTRICAL POWER SUPPLY CABLE INLET
FR - ENTRÉE DU CÂBLE D'ALIMENTATION ÉLECTRIQUE
DE - ANSCHLUß STROMKABEL
ES - ENTRADA CABLE DE ALIMENTACIÓN ELÉCTRICA
RU - ВХОД ДЛЯ ЭЛЕКТРИЧЕСКОГО КАБЕЛЯ ПИТАНИЯ



Genuine freshness

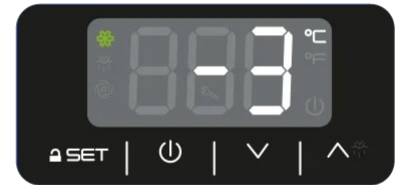


Model: **CFNO071A-X**


CABINETS GASTRONORM LINE - POP LINE - TEMP. -20 / -10 °C - 24 x GN 2/1. AIR CONDENSING UNIT



Easy to use




100% Recyclable




Ideal for any
installation



Shiny cleanliness



High insulation
thickness
80 mm



Respecting the
environment



Ecological
refrigerant gas



CONTROL AND CONNECTIVITY

- HACCP alarm indication
- Command interface with capacitive teletermostat

STRUCTURAL CHARACTERISTICS

- Monoblock construction.
- External Scotch Brite satin finish stainless steel.
- 80 mm-thick insulation.
- Locking fixtures.
- Die-moulded and leakproof internal base
- Copper-aluminium evaporating coil, cataphoresis-painted
- Magnetic gasket on all four sides of the door and main body
- Easily-open Dashboard to facilitate periodic maintenance (condenser cleaning)
- Painted condensing coil with high thermal efficiency exempt from cleaning
- Polymer interior
- Moulded side panels with 24 positions

REFRIGERANT GROUP

- Automatic defrost and defrost water self evaporating without the use of energy.
- Tropicalized group (class "T" 43°C).
- Climate class 5.
- R290 ecological refrigerant gas

STANDARD EQUIPMENT

3-GRR-GN21: N. 3 RILSAN SHELFs GN 2/1, PLASTICIZED - FOR EACH COMPARTMENT

OPTIONAL TO BE REQUESTED WHEN ORDERING

SKRT-AVPG: WHEEL KIT WITH BRAKE

EXTRA ACCESSORIES THAT CAN BE INSTALLED FOLLOWING PURCHASE

KRT-AVPG: WHEEL KIT WITH BRAKE

GRR-GN21: RILSAN SHELF GN 2/1 - PLASTICIZED

DIMENSIONS

| | | |
|---------------------|----|------|
| Width | mm | 700 |
| Depth | mm | 840 |
| Height | mm | 2090 |
| Useful Inner Width | mm | 620 |
| Max Useful Height | mm | 1442 |
| Package width | mm | 740 |
| Package depth | mm | 880 |
| Package height | mm | 2240 |
| Weight | Kg | 136 |
| Weight with package | Kg | 146 |

TECHNICAL DATA

| | | |
|--------------------------------|----|---------------------|
| Working temperature | °C | -20 / -10 |
| Motor | | Air condensing unit |
| Doors numbers | | 1 |
| Climate class | | 5 |
| Energy class | | D |
| EEL - Energy Efficiency Index | | 46,67 |
| GWP - Global Warming Potential | | 3 |
| Refrigerant - Type | | R290 |
| Refrigerant - Quantity | g | 47 |


CAPACITY

| | | |
|---------------|----|-------------|
| Capacity - GN | | 24 x GN 2/1 |
| Useful volume | lt | 644,40 |
| Capacity | | 24 x GN 2/1 |

POWER SUPPLY

| | | |
|----------------------|----|-------|
| Max electric power | kW | 0,586 |
| Cooling power | kW | 0,516 |
| Max consumption | A | 2,8 |
| Power supply voltage | V | 230 |
| Electrical_Phase | | 1 |
| Frequency | Hz | 50 |

* BT - Evap. temp. -25°C / Cond. temp. +45°C.

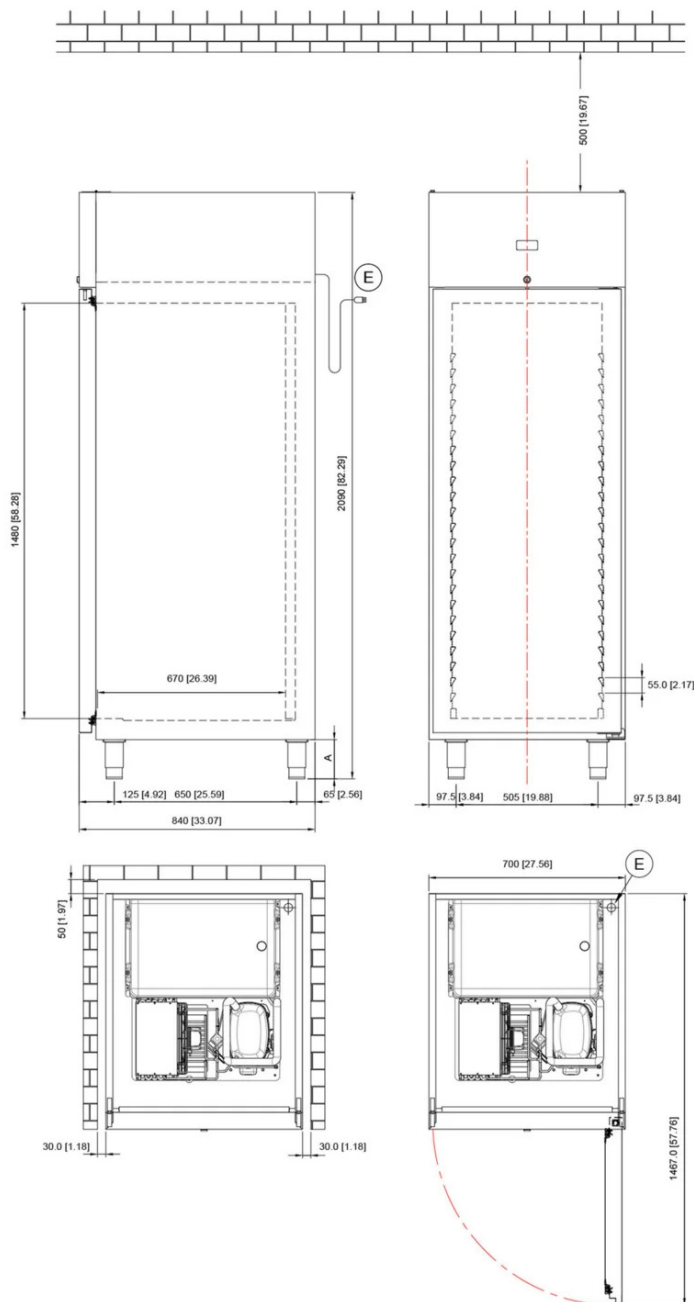

DIMENSIONI mm

DIMENSIONS [in]

A = 120 / 160 PIEDINI - FEET

A = 155 RUOTE ø 100 - CASTORS ø 100

- (E) IT - INGRESSO CAVO ALIMENTAZIONE ELETTRICA
 EN - ELECTRICAL POWER SUPPLY CABLE INLET
 FR - ENTRÉE DU CÂBLE D'ALIMENTATION ÉLECTRIQUE
 DE - ANSCHLUß STROMKABEL
 ES - ENTRADA CABLE DE ALIMENTACIÓN ELÉCTRICA
 RU - ВХОД ДЛЯ ЭЛЕКТРИЧЕСКОГО КАБЕЛЯ ПИТАНИЯ