


Model: **CPG11A**

Gravity

PROVER RETARDER CABINET - SERIE GRAVITY - TEMP. -20 / +35 °C - 20 X EN1. AIR CONDENSING UNIT



-20 °C | +35 °C

Fresh or frozen



Easy to use




Always leavened
perfect



Everything is
always under
control



Always guaranteed
results



Ergonomics



Experience at your
service



ECOLOGICAL
REFRIGERANT
GAS



COMMANDS, CONTROLS AND SAFETY DEVICES

- HACCP alarm management.
- Connectivity with Wi-Fi remote control.
- The know-how of the best experts at your disposal
- Temperature range -20°C / +35°C
- 7" touch screen color display with control interface
- Ventilation control with 5 variable speeds
- Cell humidity management via hygrometric probe
- Controls positioned on the front door

STRUCTURAL CHARACTERISTICS

- Monoblock construction.
- Internal stainless steel.
- External Scotch Brite satin finish stainless steel.
- 80 mm-thick insulation.
- High density CFC and HCFC-free PU insulation (42 kg/m³).
- Ergonomic stainless steel handle.
- Self-closing doors with opening position block at 100° and magnetic gaskets on all 4 sides.
- Silk-screened tempered glass easily-open Dashboard to facilitate periodic maintenance (condenser cleaning)
- Rounded cell corners for easy cleaning.
- Indirect ventilation thanks to the full-length duct system for optimal air circulation and uniform temperature distribution.
- Integrated LED lighting on the dashboard.
- Locking fixtures.

REFRIGERANT GROUP

- Monoblock ceiling system with an evaporator outside the cold room to allow for the exploitation of the entire refrigerated volume.
- Automatic defrost and defrost water self evaporating without the use of energy.
- Tropicalized group (class "T" 43°C).
- Climate class 5.
- R452a ecological refrigerant gas

STANDARD EQUIPMENT

WI-FI: WI-FI CONNECTION
IOTK: CONNECTIVITY KIT
20-CGL: N. 20 COUPLE OF L-SHAPED SLIDES

OPTIONAL TO BE REQUESTED WHEN ORDERING

TS-AVPG: AC 208/230 V - 60 HZ
SKRT-AVPG: WHEEL KIT WITH BRAKE
SCGL-EN1-450: "L" SLIDES PAIR - EN1 - L=450 - AISI 304
SZC-EN1: CLOSING PLINTH

EXTRA ACCESSORIES THAT CAN BE INSTALLED FOLLOWING PURCHASE

CGL-EN1-450: "L" SLIDES PAIR - EN1 - L=450 - AISI 304
IOTC-3: COLDCLOUD CONNECTION FEE - 3 YEARS
IOTC-1: COLDCLOUD CONNECTION FEE - 1 YEAR
KRT-AVPG: WHEEL KIT WITH BRAKE
ZC-EN1: CLOSING PLINTH

DIMENSIONS

Width	mm	780
Depth	mm	800
Height	mm	2090
Door Span Width	mm	620
Internal Depth	mm	555
Door Span Height	mm	1442
Package width	mm	820
Package depth	mm	840
Package height	mm	2240
Package volume	m ³	1,54
Weight	Kg	151
Weight with package	Kg	161

TECHNICAL DATA

Working temperature	°C	-20/+35
Motor		Air condensing unit
Climate class		Classe 5
GWP - Global Warming Potential		2141
Refrigerant - Type		R452A
Refrigerant - Quantity	g	473


CAPACITY

Capacity		20 x EN1
----------	--	----------

POWER SUPPLY

Max electric power	kW	2,236
Cooling power	kW	567
Max consumption	A	10,8
Power supply voltage	V	230
Electrical_Phase		1
Frequency	Hz	50

* BT - Evap. temp. -25°C / Cond. temp. +45°C.

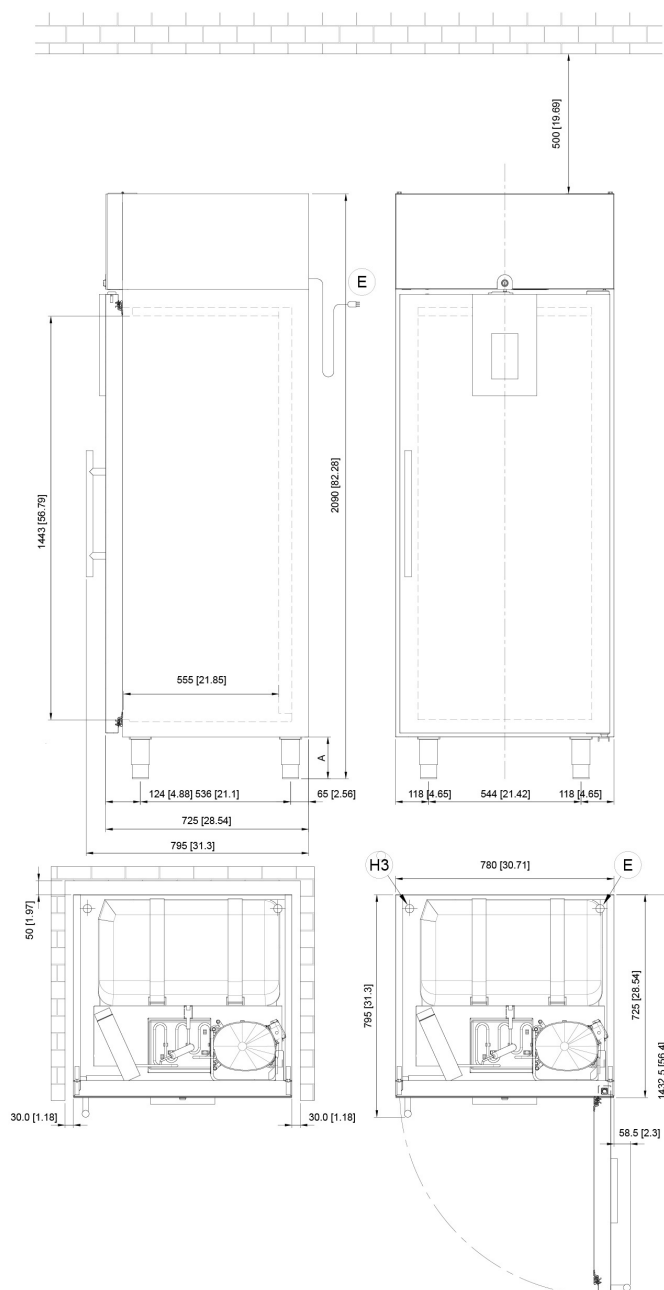

DIMENSIONI mm

DIMENSIONS [in]

A = 140 / 200 PIEDINI - FEET

A = 155 RUOTE \varnothing 100 - CASTORS \varnothing 100

- Ⓔ IT - INGRESSO CAVO ALIMENTAZIONE ELETTRICA
 EN - ELECTRICAL POWER SUPPLY CABLE INLET
 FR - ENTRÉE DU CÂBLE D'ALIMENTATION ÉLECTRIQUE
 DE - ANSCHLUß STROMKABEL
 ES - ENTRADA CABLE DE ALIMENTACIÓN ELÉCTRICA
 RU - ВХОД ДЛЯ ЭЛЕКТРИЧЕСКОГО КАБЕЛЯ ПИТАНИЯ

- Ⓕ CONNESSIONE INGRESSO ACQUA UMIDIFICATORE
 HUMIDIFIER WATER INLET CONNECTION