


Multi-Eco condensation hood PRO

For JOKER

Factory fitted or for retrofitting - Control top/right/left

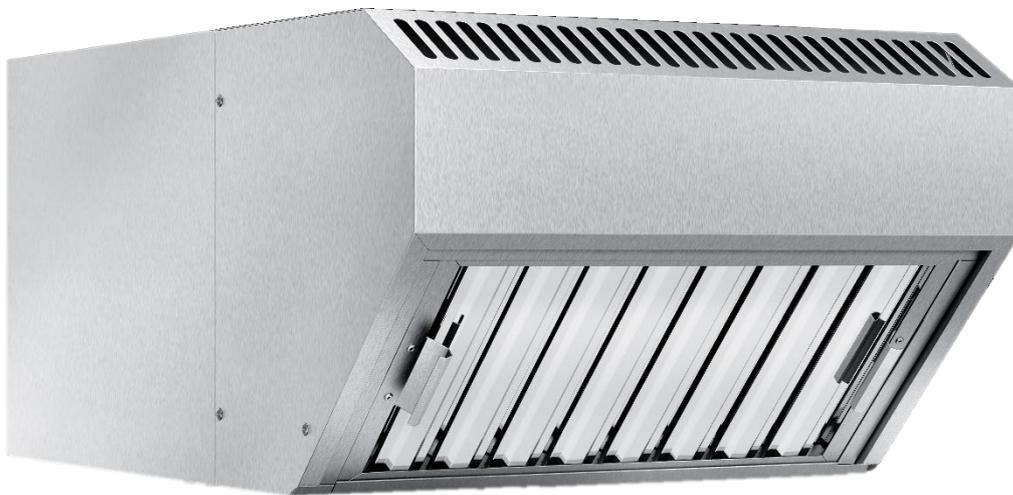

HIGHLIGHTS

Our multi-eco condensation hood PRO is available for all JOKER mix stations. It condenses the resulting vapours as well as fumes and is the ideal solution for the removal of grease, odours and particles. With its multi-stage filter system, it is ideal for use in food retail, for front cooking or at hot counters. It impresses with its ergonomic design and is hygienically perfect thanks to easy, time-saving cleaning and maintenance.

- Switch on and fully automatic control via the combi steamer
- Condensation of vapours via air-cooled tube condenser
- Effective extraction with the door open
- Effective filtering of grease, odours and particles
- Continuous drainage of the condensate via the waste water system of the combi steamer
- 2 air output levels: The high air output level is activated when the door is open, during cooking processes and autoclean® PRO.

Multi-eco condensation hood PRO for JOKER - 6-23, 6-43, 6-11

Device data

INFORMATION:

The PRO multi-eco condensation hood is available in different versions, each matching the device, and is supplied as an already assembled unit with the device or as a retrofit kit.

The unit size-dependent data only differ between the left/right control arrangement and the top control arrangement.

	Type	6-23	6-43	6-11
Material		1.4301	1.4301	1.4301
Design module		according to DIN 18866	according to DIN 18866	according to DIN 18866
Protection class		IPX5	IPX5	IPX5
Device dimensions				
Control top (WxDxH) [mm]		520 x 757 x 350	520 x 887 x 350	520 x 937 x 350
Control left/right (WxDxH) [mm]		650 x 757 x 350	650 x 887 x 350	650 x 937 x 350
Weights				
Controller, left/right [kg]		38.5	40.0	40.5
Controller, top [kg]		36.6	37.9	38.4

Electrical connection

	Type	6-23	6-43	6-11
Voltage 230V / 1N AC				
Power requirement [W]			Level 1: 165 / Level 2: 230	
Rated current [A]			max. 1.0	
Fuse protection			About combi steamers	
Minimum cross section for connection [mm ²]			4 x 1.5	

Extraction volume, noise emission

	Type	6-23	6-43	6-11
Maximum extraction volume [m ³ /h]			720	
Noise emission [dB (A)]			< 52	

Multi-eco condensation hood PRO for JOKER - 6-23, 6-43, 6-11

Equipment

- 2 fan speeds
- With device contour without overhang at sides and rear, overhang at front approx. 7.5 cm from door handle to front of hood
- Electrical control / power supply from combi steamer
- No additional installations for power supply and waste water necessary
- Spray water protection IPX5
- Integrated tube condenser
- Differential pressure sensor for monitoring the particle filter
- Filter elements:
 - Activated carbon filter
 - Particle filter
 - Grease filter
 - Flame protection filter

Versions

	Type	6-23	6-43	6-11
KH PRO (factory fitted)				
Controller, top		EL2008883	EL2008887	EL2008889
Controller, left/right		EL2008893	EL2008895	EL2008897
N-KH PRO (can be retrofitted)				
Controller, top		EL2010141	EL2010142	EL2010143
Controller, left/right		EL2010144	EL2010145	EL2010146

Approvals/test markings



WE AT ELOMA WILL BE HAPPY TO HELP YOU WITH ANY QUESTION RELATING TO OUR
PRODUCTS

CUSTOMER SERVICE

T. +49 8141 395-188
F. +49 8141 395-164
sales@eloma.com

APPLICATION ADVICE

T. +49 8141 395-150
applications@eloma.com

TECHNICAL SERVICE

T. +49 35023 63-888
F. +49 8141 359-156
service@eloma.com



Eloma GmbH • Otto-Hahn-Str. 10 • 82216 Maisach/Germany
T. +49 8141 395-0 • F. +49 8141 395-130 • sales@eloma.com

an Ali Group Company



The Spirit of Excellence