

## Modular Ice Machine 220 kg

Item #:
Project:
Quantity:



### FEATURES

- Top Materials: AISI 304 Stainless steel and new removable grid
- Core Ice System: Stable evaporator system (Axial load).
- New Core Evaporator: Highly balanced auger (double fly system).
- New Gearmotor: Evaporator stability improved and noise free.
- Innovative Ice Breaker: Very dry flake ice - 12% of water contents.
- Durable Operations: High efficiency and better performance.
- Easy to Clean: Facilitated cleaning process and XSafe standard.
- New High-tech Water Sump with easy regulation system.
- New ice level sensor: for seamless operations.
- New Display: Touch & Smart.
- XWave: New App with improved electronics and programming.



MXF 427  
Superflake ice  
Residual water content 12%

### CONDENSING SYSTEM

Air cooled

### REFRIGERANT GAS

R290

### VOLTAGE V/Hz/ph

230/50/1

### RECOMMENDED BINS

Head	Bins	kg
MXF 427	<b>SB322</b>	168



### CERTIFICATIONS



### OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

**IMPORTANT NOTICE:**  
Models and specifications are subject to change without notice.  
This spec sheet is meant for commercial purpose only.  
For technical documentation please refer to our service manuals.


[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)

Modular Ice Machine 220 kg

## Modular Ice Machine 220 kg

Item #:
Project:
Quantity:

Modular Ice Machine 220 kg

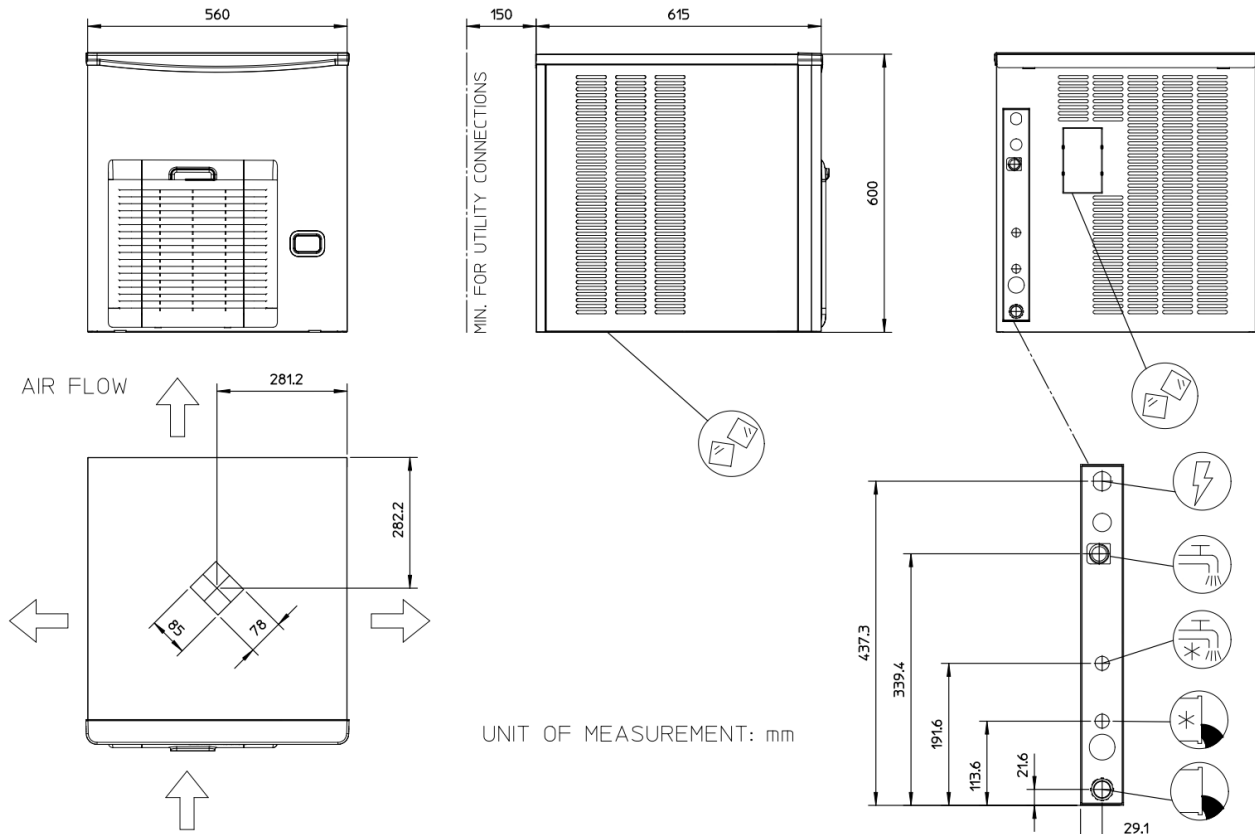

UNIT OF MEASUREMENT: mm

UNIT DATA		SHIPPING DATA									
Size (W x D x H)	560 x 615 x 600 mm	Carton (W x D x H)	625 x 690 x 775 mm								
Net weight	51 kg	Weight	61 kg								
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm <sup>2</sup>	A
MXF 427 AS OX	230/50/1	215	187	170	9.6	16.3	7.9	750	1900	3 x 1.5	10
MXF 427 WS OX	230/50/1	240	230	200	7.5	14.9	173	630	1197	3 x 1.5	10

(\*) Data refer to 32°C Amb. / 21°C Water temperature conditions