

AFC 80 *XSafe*

Self Contained Ice Machine 82 kg

Item #:
Project:
Quantity:



FEATURES

- Produces "Cubelet" ice (compressed ice flakes).
- Resistant stainless steel exterior.
- Reliable electronic controls.
- Front panel in & out airflow (air-cooled model only) for built-in installation.
- Routine maintenance visible alarm light on front panel.
- Ergonomically designed ice-storage access, with disappearing door.
- Ice scoop holder located within ice-storage bin.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.

CONDENSING SYSTEM

Air cooled
Water cooled

REFRIGERANT GAS

R134a

VOLTAGE V/Hz/ph

230/50/1
230/60/1

INTERNAL BIN CAPACITY

25 kg



AFC 80
Cubelet 1 g
W 16 x D 15 x H 7-8 mm

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com


Self Contained Ice Machine 82 kg

AFC 80 XSafe

Self Contained Ice Machine 82 kg

Item #:
Project:
Quantity:

Self Contained Ice Machine 82 kg

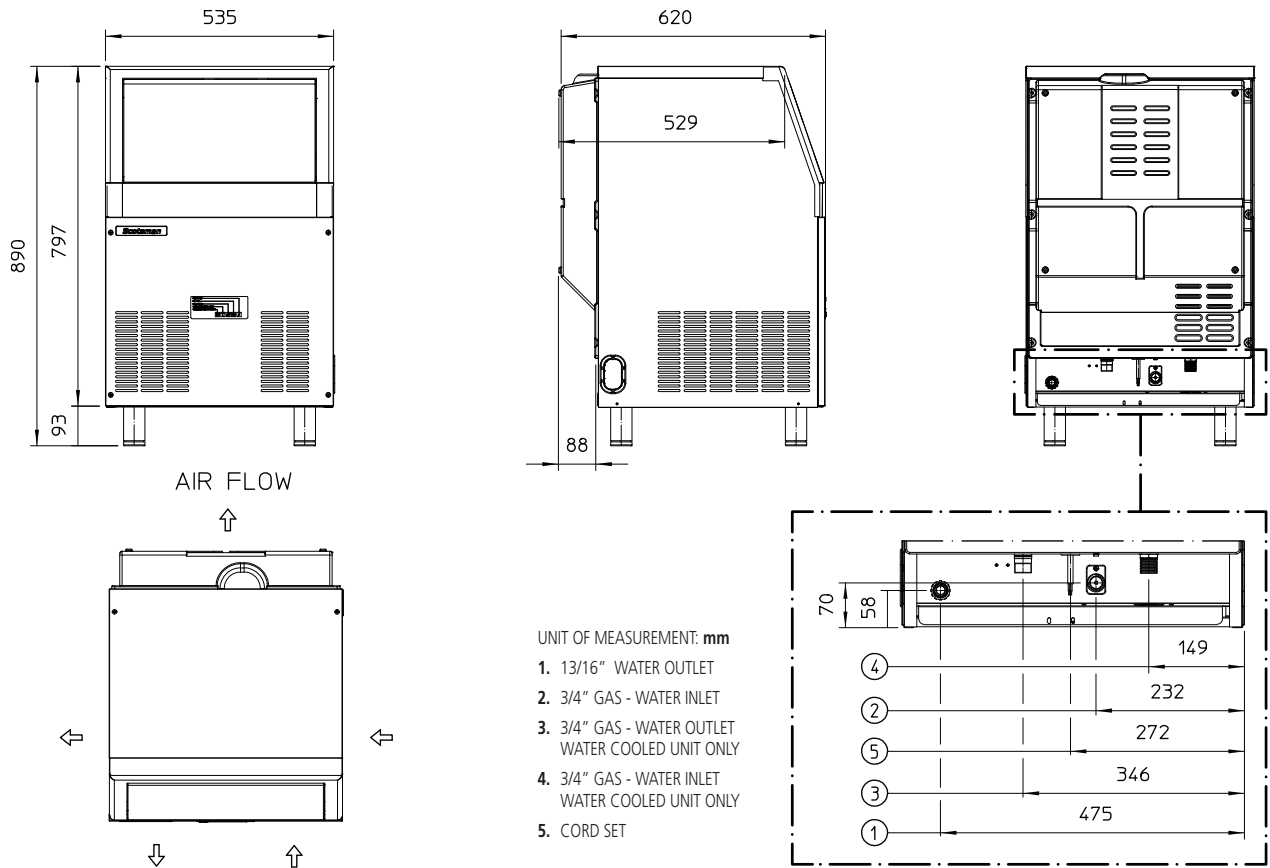

UNIT DATA		SHIPPING DATA									
Size (W x D x H)	535 x 620 x 890 mm	Carton (W x D x H)	600 x 690 x 980 mm								
Net weight	50 kg	Weight	58 kg								
Version	Voltage	24 h ice production kg			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
		10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W	W	No. x Ømm²	A
AFC 80 AS	230/50/1	82	75	64	18.9	12.1	2.8	440	1570	3 x 1.5	10
AFC 80 WS	230/50/1	85	82	72	16.7	12.0	29.0	350	1570	3 x 1.5	10
AFC 80 AS	230/60/1	71	70	59	18.7	11.0	2.6	500	690	3 x 1.5	10

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions